

TITAN Wireless Finger PTT



Part number: WPTT-FGR

Technical data			
Dimensions (H x W x D):	30 x 20 x 10 mm	Maximum range:	Up to 70 meters
Weigth:	10 g	Operating temperature:	20 to +45 Celsius
Battery:	CR1632	IP rating:	IP66
Battery Life Time:	Typical 9 months	Module:	Aircrypt Low Energy Module 2.4 Ghz
Output Power:	7.5dBm low energy maximum transmit output power	Receive Sensitivity:	(-)92.5dBm low energy receive sensitivity

TITAN COMMUNICATION SYSTEMS **Denmark** Skovlytoften 26 B, st. │ DK-2840 Holte │ info@titancomsys.com

Tel: +45 3212 4002 | Fax: +45 3212 4002

Web www.titancomsys.com


Customized audio solutions for critical communications: Titan Communication Systems has its head office in Holte, Denmark. Here a dedicated staff; Design and develop High technology software solutions. Titan Communication Systems has a strategic partnership with Comufrance, Paris, France where many products are being designed, engineered and assembled, including hands-on quality control throughout the production process.



TITAN Wireless Finger PTT

THE TITAN WIRELESS FINGER PTT

can be used in multiple solutions and devices, weither its a remote speaker mic, headset or inductive kit, the performance is very satisfactory and professional.

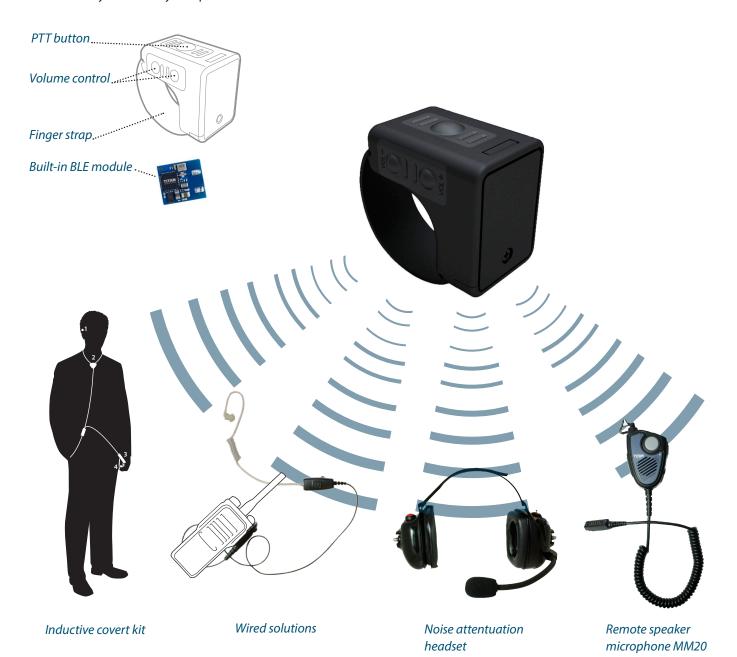

TITAN COMMUNICATION SYSTEMS **Denmark** Skovlytoften 26 B, st. │ DK-2840 Holte │ info@titancomsys.com

Tel: +45 3212 4002 | Fax: +45 3212 4002

Web www.titancomsys.com

Customized audio solutions for critical communications: Titan Communication Systems has its head office in Holte, Denmark. Here a dedicated staff; Design and develop High technology software solutions. Titan Communication Systems has a strategic partnership with Comufrance, Paris, France where many products are being designed, engineered and assembled, including hands-on quality control throughout the production process.